

AHAM PORTABLE ELECTRIC ROOM AIR CLEANER CERTIFICATION PROGRAM VERIFICATION TESTING REPORT (A-5)

Conducted in Accordance with ANSI / AHAM AC-1 (latest edition)

Issue Date:	November 28, 2018		
Test No.	AC-18076-E	Report Number	103659649CRT-001
Test Code	FST	Program Year	2018
Rendered To:	ELFI Elektrofiter AB Maskingatan 2-4 441 39, Alingsas Sweden		
Brand Name:	Wood's	Test Date:	November 13-14, 2018
Brand Owner:	Tes Scandinavia AB	Model No.:	ELFI 155
Manufacturer:	ELFI Elektrofiter AB	Serial No.:	TALL15518301213
Selection Date:	September 19, 2018	Voltage:	220-230
Received Date:	October 1, 2018	Frequency (Hz):	50-60
CLEAN AIR DELIVERY RATE (CADR)			
Pollutant	Certified Value	Measured Value	Measured / Certified %
Smoke	84	79.0	94
Dust	94	93.4	99
Pollen	113	149.3	132
ENERGY STAR VERIFICATION			
Results			
Dust CADR/Watt	5.3	PASS	
Standby Power (Watts)	0.06	PASS	
NATURAL DECAY DATA			
Parameter	Smoke	Dust	Pollen
Room Conditions			
Temperature, °F	68	68	67
Humidity, %	37	43	42
Background Count, part/cc	0.31	0.01	0.02
Test Data	Smoke	Dust	Pollen
Initial Concentration, part/cc	28468	273.76	7.34
Decay Constant	0.0025	0.0054	0.1005
Slope Std. Deviation	0.13	0.15	2.32
EXPERIMENTAL DECAY DATA			
Parameter	Smoke	Dust	Pollen
Room Conditions			
Temperature, °F	68	68	67
Humidity, %	36	38	42
Background Count, part/cc	0.31	0.01	0.01
Test Data	Smoke	Dust	Pollen
Initial Concentration, part/cc	27704	356.66	6.43
Decay Constant	0.0809	0.0981	0.2486
Slope Std. Deviation	0.71	0.62	5.61
Watts	17.56	17.65	17.92
Comments:	Our verification results show this sample meets the AHAM Certification Program and ENERGY STAR Program requirements and shall remain certified. This units nameplate is 220-230V 50-60Hz. The unit was tested at 120V, 60Hz as the unit has an external power adaptor and the air cleaner assembly only see a supply voltage of 12V DC. Filter Cartridge Model: Active ION HEPA Filter per Manual		

Randy Springer

Program Administrator

Michael J. Hudson

Program Manager


This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

CONFIDENTIAL

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Smoke Natural

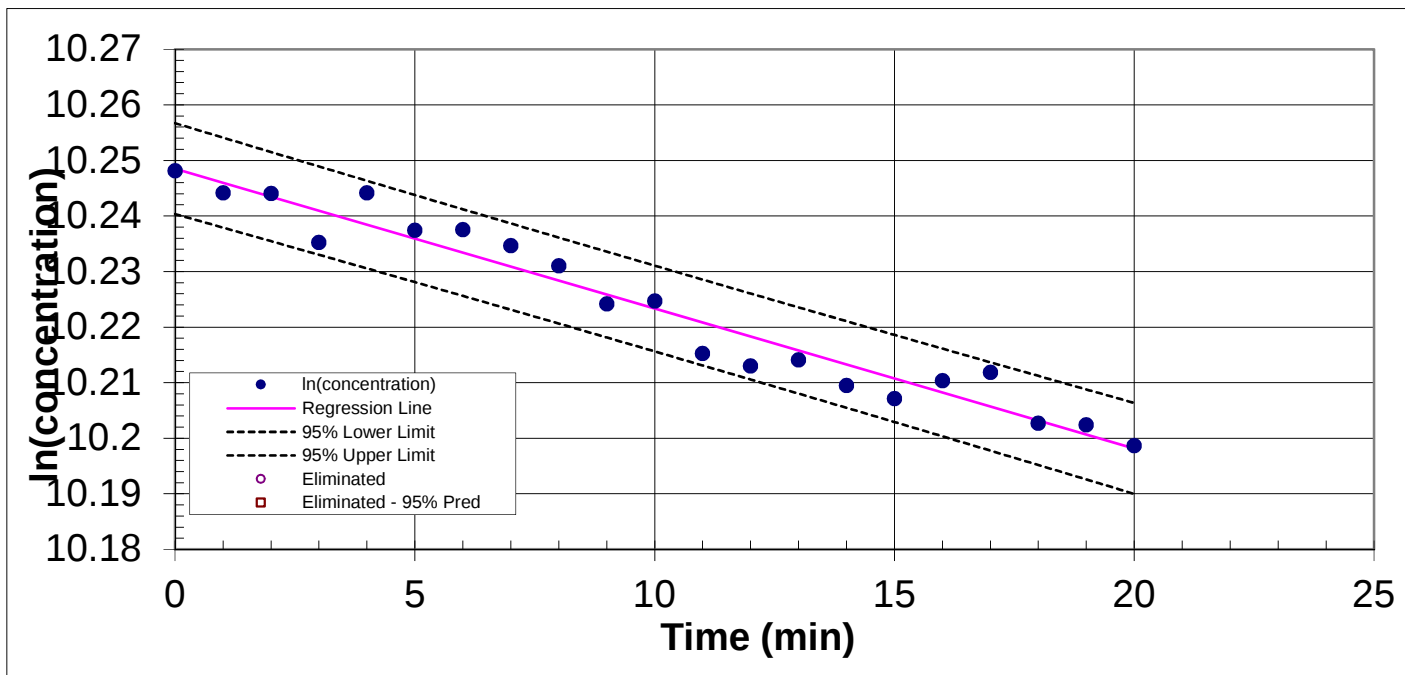

TIME(MIN)	Cti	ln(Cti)	TIME(MIN)	Cti	LN(Cti)
0.00	28,229.73	10.25	11.00	27,316.28	10.22
1.00	28,118.53	10.24	12.00	27,255.79	10.21
2.00	28,115.17	10.24	13.00	27,285.43	10.21
3.00	27,867.71	10.24	14.00	27,159.56	10.21
4.00	28,117.61	10.24	15.00	27,095.41	10.21
5.00	27,929.42	10.24	16.00	27,183.08	10.21
6.00	27,932.48	10.24	17.00	27,224.63	10.21
7.00	27,852.13	10.23	18.00	26,975.65	10.20
8.00	27,750.40	10.23	19.00	26,967.40	10.20
9.00	27,561.29	10.22	20.00	26,867.50	10.20
10.00	27,575.35	10.22			


Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Decay Constant	0.00252	-	-	
Slope Standard Deviation (cfm)	0.13	-	2.00	YES
Background at Injection (part/cc)	0.3055	-	20.00	YES
Initial Concentration (part/cc)	28470	24000	35000	YES
Data points used	21	9	-	YES
Average Temperature (°F)	68	65	75	YES
Average Humidity (%RH)	37	35	45	YES
Average Input Voltage (volts)	0.0			
Average Test Unit Power (watts)	0.0			

--	--	--

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Smoke Measured

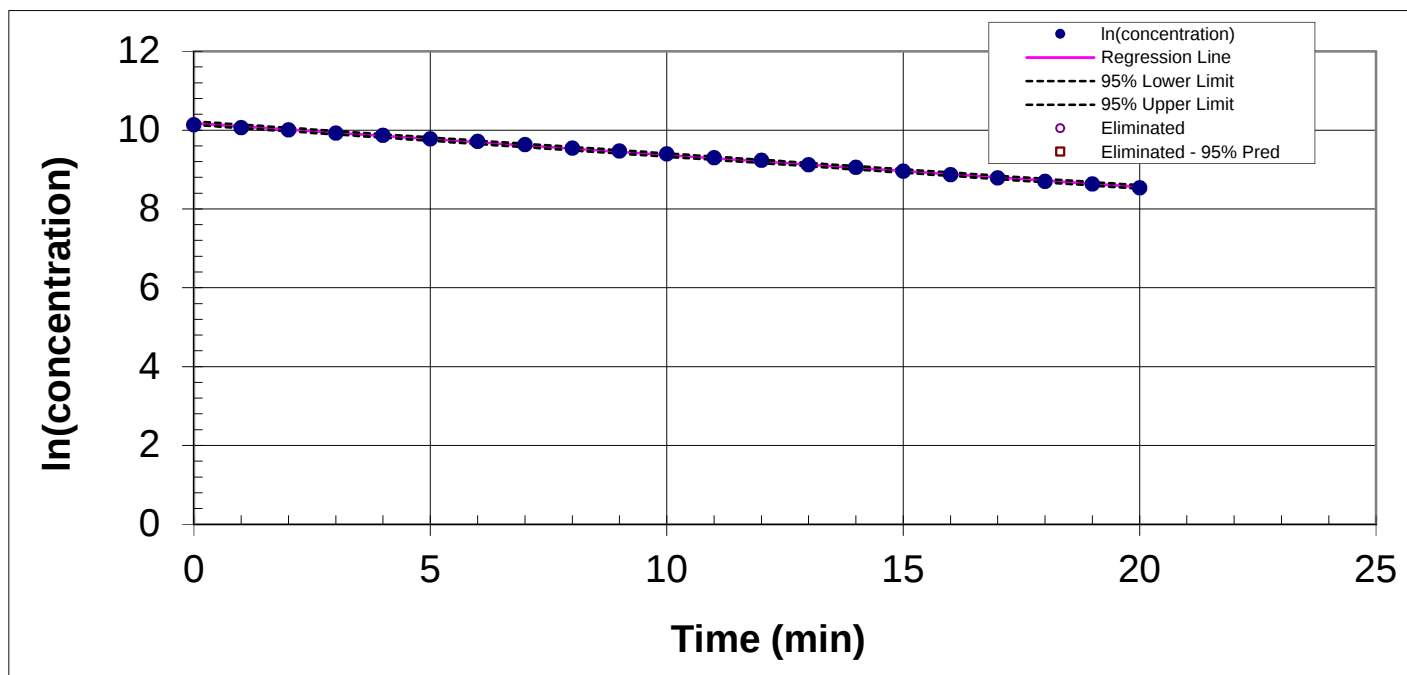

TIME(MIN)	Cti	ln(Cti)	TIME(MIN)	Cti	LN(Cti)
0.00	25,281.35	10.14	11.00	10,963.17	9.30
1.00	23,510.36	10.07	12.00	10,210.42	9.23
2.00	22,149.67	10.01	13.00	9,165.00	9.12
3.00	20,324.92	9.92	14.00	8,579.97	9.06
4.00	19,244.06	9.86	15.00	7,744.43	8.95
5.00	17,616.35	9.78	16.00	7,110.21	8.87
6.00	16,454.84	9.71	17.00	6,561.22	8.79
7.00	15,233.45	9.63	18.00	6,002.77	8.70
8.00	13,941.80	9.54	19.00	5,604.70	8.63
9.00	12,922.34	9.47	20.00	5,080.16	8.53
10.00	11,987.82	9.39			


Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Decay Constant	0.08092	-	-	
Slope Standard Deviation (cfm)	0.71	-	8.16	YES
Background at Injection (part/cc)	0.3055	-	20.00	YES
Initial Concentration (part/cc)	27704	24000	35000	YES
Data points used	21	9	-	YES
Average Temperature (°F)	68	65	75	YES
Average Humidity (%RH)	36	35	45	YES
Average Input Voltage (volts)	120.1			
Average Test Unit Power (watts)	17.6			

CADR	79.03		
CADR Standard Deviation	0.7	9.0	YES

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Dust Natural

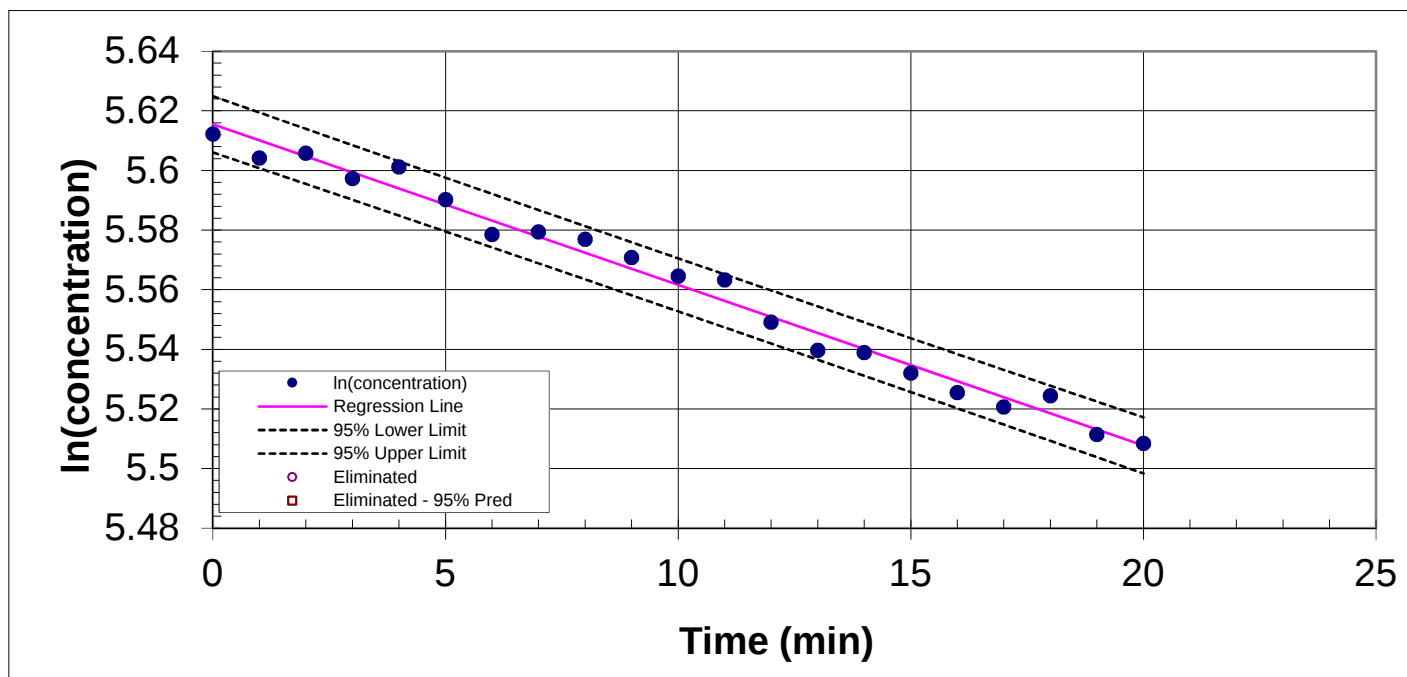

TIME(MIN)	Cti	ln(Cti)	TIME(MIN)	Cti	LN(Cti)
0.00	273.76	5.61	11.00	260.67	5.56
1.00	271.56	5.60	12.00	256.99	5.55
2.00	271.99	5.61	13.00	254.59	5.54
3.00	269.70	5.60	14.00	254.39	5.54
4.00	270.75	5.60	15.00	252.65	5.53
5.00	267.78	5.59	16.00	250.99	5.53
6.00	264.66	5.58	17.00	249.79	5.52
7.00	264.91	5.58	18.00	250.72	5.52
8.00	264.25	5.58	19.00	247.50	5.51
9.00	262.63	5.57	20.00	246.76	5.51
10.00	261.01	5.56			


Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Decay Constant	0.00539	-	-	
Slope Standard Deviation (cfm)	0.15	-	1.00	YES
Background at Injection (part/cc)	0.006	-	0.03	YES
Initial Concentration (part/cc)	273.8	200	400	YES
Data points used	21	9	-	YES
Average Temperature (°F)	68	65	75	YES
Average Humidity (%RH)	43	35	45	YES
Average Input Voltage (volts)	0.0			
Average Test Unit Power (watts)	0.0			
Coefficient of Determination	0.985	0.900	-	YES

--	--	--

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Dust Measured

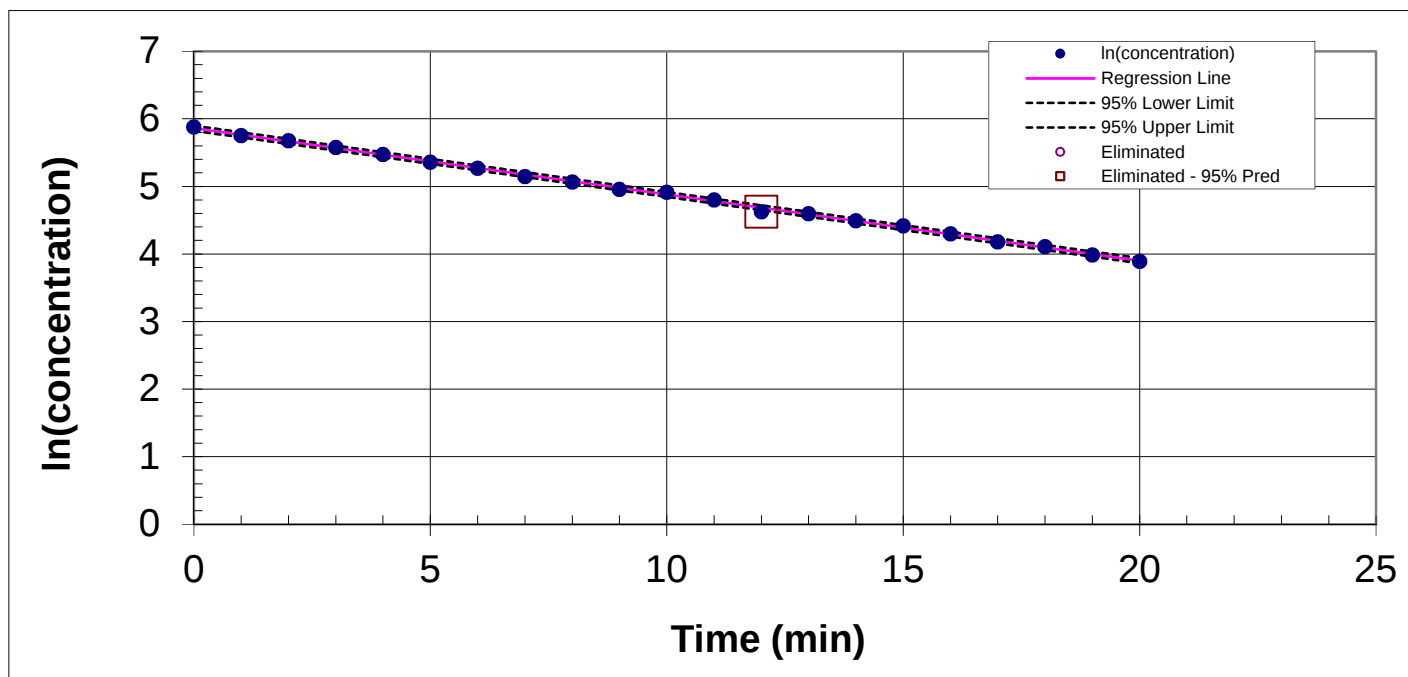

TIME(MIN)	Cti	ln(Cti)	TIME(MIN)	Cti	LN(Cti)
0.00	356.66	5.88	11.00	121.22	4.80
1.00	314.18	5.75	12.00	101.96	4.62 (eliminated - 95% pred.)
2.00	291.93	5.68	13.00	99.22	4.60
3.00	263.28	5.57	14.00	89.33	4.49
4.00	238.17	5.47	15.00	82.53	4.41
5.00	212.68	5.36	16.00	73.59	4.30
6.00	193.96	5.27	17.00	65.35	4.18
7.00	171.17	5.14	18.00	60.79	4.11
8.00	158.08	5.06	19.00	53.65	3.98
9.00	141.82	4.95	20.00	48.96	3.89
10.00	135.94	4.91			


Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Decay Constant	0.09806	-	-	
Slope Standard Deviation (cfm)	0.62	-	9.88	YES
Background at Injection (part/cc)	0.012	-	0.03	YES
Initial Concentration (part/cc)	356.7	200	400	YES
Data points used	20	9	-	YES
Average Temperature (°F)	68	65	75	YES
Average Humidity (%RH)	38	35	45	YES
Average Input Voltage (volts)	120.1			
Average Test Unit Power (watts)	17.6			
Coefficient of Determination	0.999	0.900	-	YES

CADR	93.41			
CADR Standard Deviation	0.6	0.9	10.0	YES

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Pollen Natural

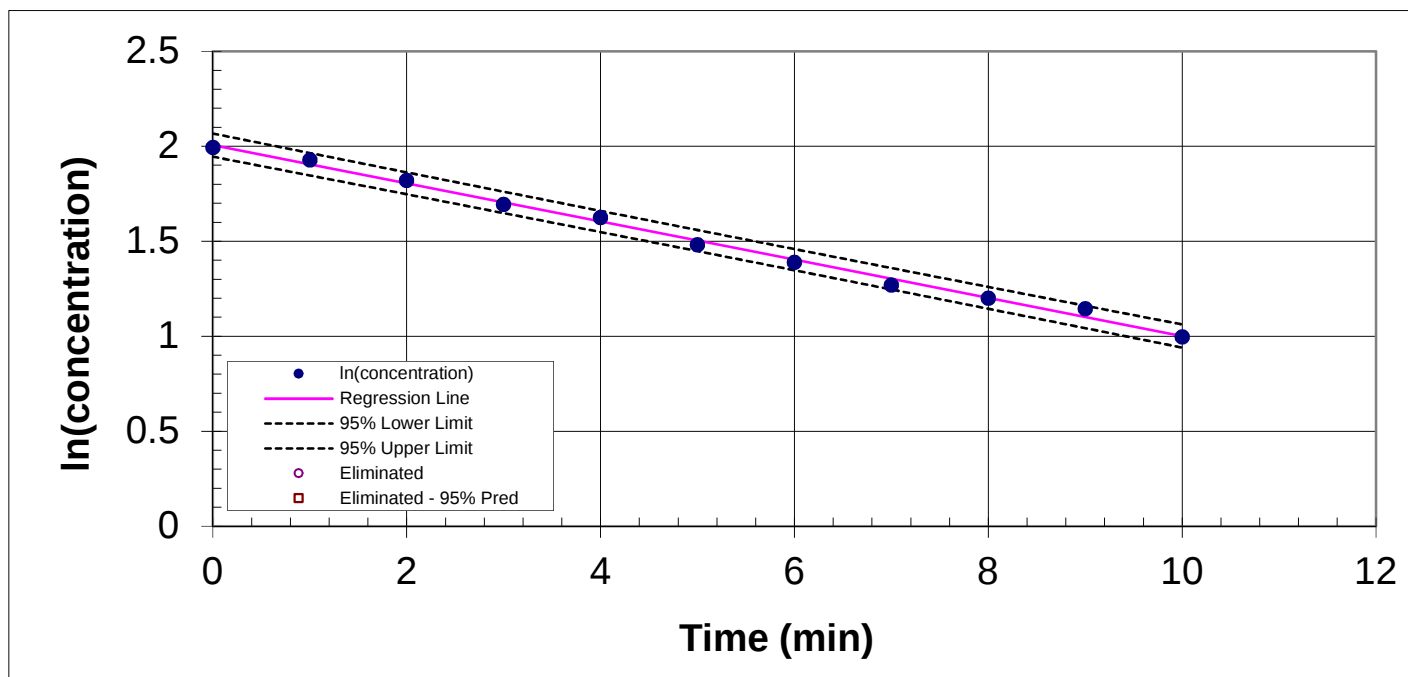

TIME(MIN)	Cti	ln(Cti)	TIME(MIN)	Cti	LN(Cti)
0.00	7.34	1.99			
1.00	6.88	1.93			
2.00	6.17	1.82			
3.00	5.43	1.69			
4.00	5.07	1.62			
5.00	4.40	1.48			
6.00	4.01	1.39			
7.00	3.56	1.27			
8.00	3.32	1.20			
9.00	3.14	1.14			
10.00	2.71	1.00			


Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Decay Constant	0.10049	0.095	0.143	YES
Slope Standard Deviation (cfm)	2.32	-	10.13	YES
Background at Injection (part/cc)	0.02	-	0.03	YES
Initial Concentration (part/cc)	7.336	4	9.5	YES
Data points used	11	5	-	YES
Average Temperature (°F)	67	65	75	YES
Average Humidity (%RH)	42	35	45	YES
Average Input Voltage (volts)	0.0			
Average Test Unit Power (watts)	0.0			
Coefficient of Determination	0.995	0.900		YES

--	--	--

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Pollen Measured

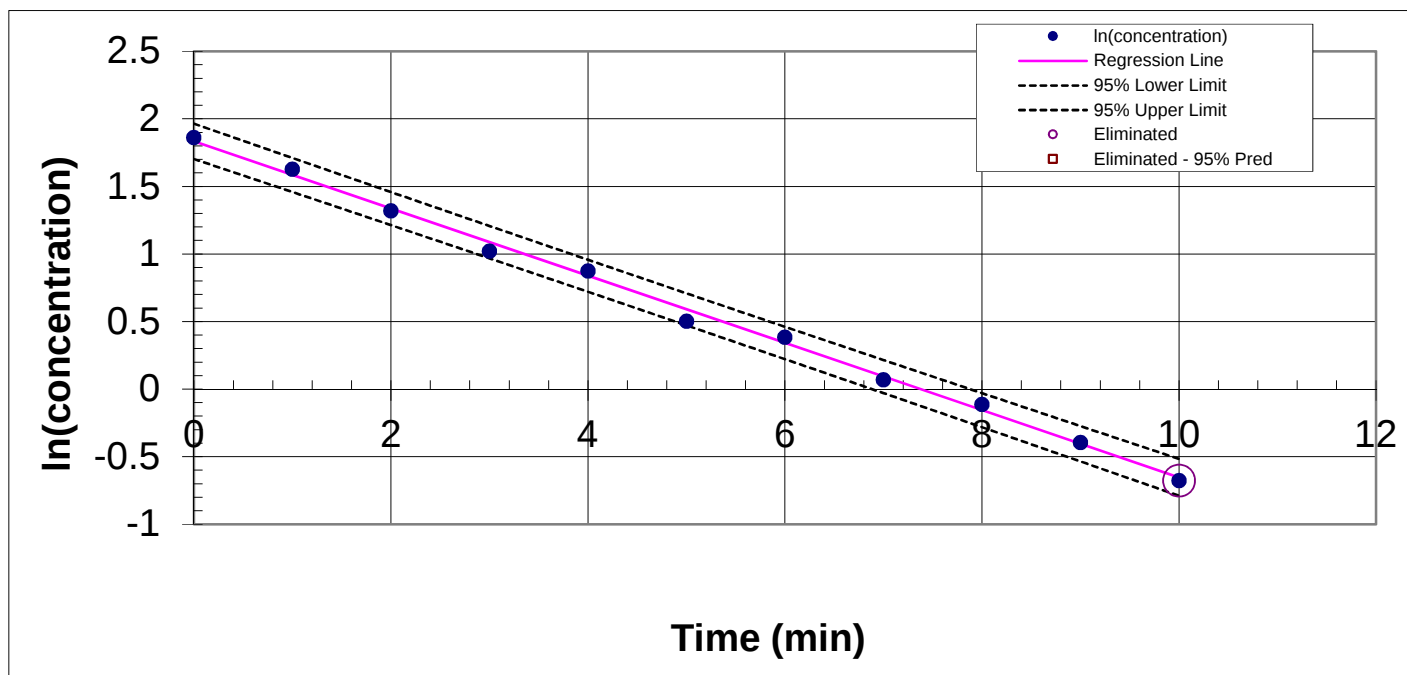

TIME(MIN)	Cti	ln(Cti)	TIME(MIN)	Cti	LN(Cti)
0.00	6.43	1.86			
1.00	5.08	1.63			
2.00	3.74	1.32			
3.00	2.77	1.02			
4.00	2.40	0.87			
5.00	1.65	0.50			
6.00	1.47	0.38			
7.00	1.07	0.07			
8.00	0.89	-0.11			
9.00	0.67	-0.39			
10.00	0.51	-0.68 (eliminated - measurability)			

Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Decay Constant	0.24864	-	-	
Slope Standard Deviation (cfm)	5.61	-	25.06	YES
Background at Injection (part/cc)	0.008	-	0.03	YES
Initial Concentration (part/cc)	6.432	4	9.5	YES
Data points used	10	5	-	YES
Average Temperature (°F)	67	65	75	YES
Average Humidity (%RH)	42	35	45	YES
Average Input Voltage (volts)	120.2			
Average Test Unit Power (watts)	17.9			
Coefficient of Determination	0.996	0.900		YES

CADR	149.33		
CADR Standard Deviation	6.1	-	29.9
			YES

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Operating Power

Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Operating Power (watts)	17.6			
Operating Voltage (volts)	120.1	119	121	YES
Points Used	13	10		YES
Dust CADR	93.41			
Energy Star (CADR/Watt)	5.3	2.0		YES
Operating Power (watts)	17.6			

AC-1 Air Cleaner Testing Facility

Control Number PS-CRT1809041403-001
Test Number AC-18076-E TALL 155

Standby Power

Quantity	Measured	Lower Limit	Upper Limit	Acceptable
Standby Watt Variation	0.46%		5%	YES
Standby Duration (minutes)	22.0	5		YES
Standby Voltage (volts)	114.9	114	116	YES
Standby Frequency (Hz)	59.9	59	61	YES
Standby Temp (degF)	67.7	64.4	82.4	YES
Standby THD (%)	0.10%		2%	YES

Standby Power (watts)	0.1	2.0	YES
-----------------------	-----	-----	-----